

# TWIN TWIST, COUNTER-TOP, GRAVITY SOFT SERVE/YOGURT FREEZER


**E131/F131**



Modified Design  
for FrozenYogurt  
Installations

- Precision controlled refrigeration system designed for quality product consistency from the first cone to the last.
- Hard-working, compact counter-top unit handles peak demands, while providing years of dependable service.
- IntelliTec™ control communicates with operator for worry-free operation.
- Energy Conservation Mode (ECM) protects product from over-agitation during slow or non-draw periods.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Clear door shows visible moving product for merchandising appeal.
- Self-closing spigot eliminates waste and assures precise portion control.
- Adjustable dispense rate for optimal product output.
- Long-wearing parts offer lower preventative maintenance costs.
- Built for ease of operation and cleaning.
- Twist feature allows you to serve two flavors individually or combine flavors for a unique twist.
- Optional shake mixer which mounts to the machine.
- Optional floor stand creates a "floor model" package, freeing up counter space and providing additional storage.



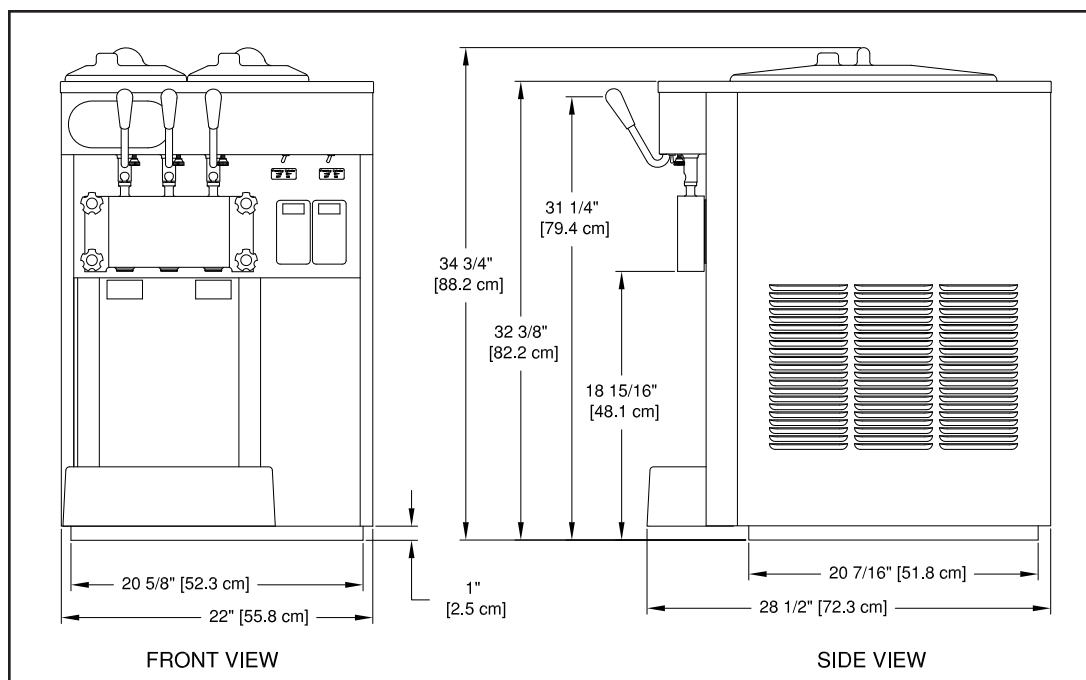

|                          | E131                                                             |                                      | F131                                       |                    |
|--------------------------|------------------------------------------------------------------|--------------------------------------|--------------------------------------------|--------------------|
| Dimensions               | Freezer                                                          | with crate                           | Freezer                                    | with crate         |
|                          | width                                                            | 22" (55,8 cm) 28" (71,0 cm)          | 22" (55,8 cm) 28" (71,0 cm)                |                    |
|                          | height                                                           | 34-3/4" (88,2 cm) 40-1/4" (102,2 cm) | 34-3/4" (88,2 cm) 40-1/4" (102,2 cm)       |                    |
| depth                    | 28-1/2" (72,4 cm) 35-1/4" (89,5 cm)                              | 28-1/2" (72,4 cm) 35-1/4" (89,5 cm)  |                                            |                    |
| Weight                   | 370 lbs (167,8 kg)                                               | 450 lbs (204,0 kg)                   | 385 lbs (174,5 kg)                         | 470 lbs (213,1 kg) |
| Electrical               | 1 Phase, 208-230 VAC, 60Hz                                       |                                      | 1 Phase, 208-230 VAC, 60Hz                 |                    |
| running amps             | approximately 12A                                                |                                      | approximately 12A                          |                    |
| connection type          | NEMA6-20P power cord provided                                    |                                      | NEMA6-20P power cord provided\             |                    |
| International Option     | 1 Phase, 220-240 VAC, 50Hz                                       |                                      | 1 Phase, 220-240 VAC, 50Hz                 |                    |
| Compressor               | 8,600 Btu/hr (R-404A)                                            |                                      | 12,000 Btu/hr (R-404A)                     |                    |
| Drive Motor              | Two - 3/4 hp                                                     |                                      |                                            |                    |
| Air Flow                 | Air cooled units require 3" (7,6 cm) air space on both sides     |                                      |                                            |                    |
| Plumbing Fittings        | Water cooled units require 3/8" N.P.T. water and drain fittings. |                                      |                                            |                    |
| Hopper Volume            | Two - 3 gallon (11,35 liters)                                    |                                      |                                            |                    |
| Freezing Cylinder Volume | Two - 0.65 gallon (2.6 quart), 2,46 liters                       |                                      | Two - 0.85 gallon (3.4 quart), 3,22 liters |                    |

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



FOODSERVICE EQUIPMENT  
 502 Highway 67 • Kiel, WI 53042-1600  
 920-894-2293 • 800-558-5807  
 Fax: 920-894-7029  
 E-mail: foodservice@stoelting.com  
 www.stoeltingfoodservice.com

ISO 9001:2000 Registered

Certified, Listed and/or Recognized by:



12/09