


SINGLE FLAVOR, COUNTER-TOP GRAVITY SOFT SERVE FREEZER



- High capacity, hard-working countertop unit guarantees years of dependable service
- Self-sharpening, nonmetallic auger flights for reliable service
- Energy Conservation Mode (ECM) protects product from over-agitation during slow or non-draw periods
- Patented mix inlet regulators provide optimum product quality, consistently low portion cost, and no priming
- Self-closing, faucet-style spigot eliminates waste and assures precise portion control
- Durable stainless steel exterior
- Optional floor stand

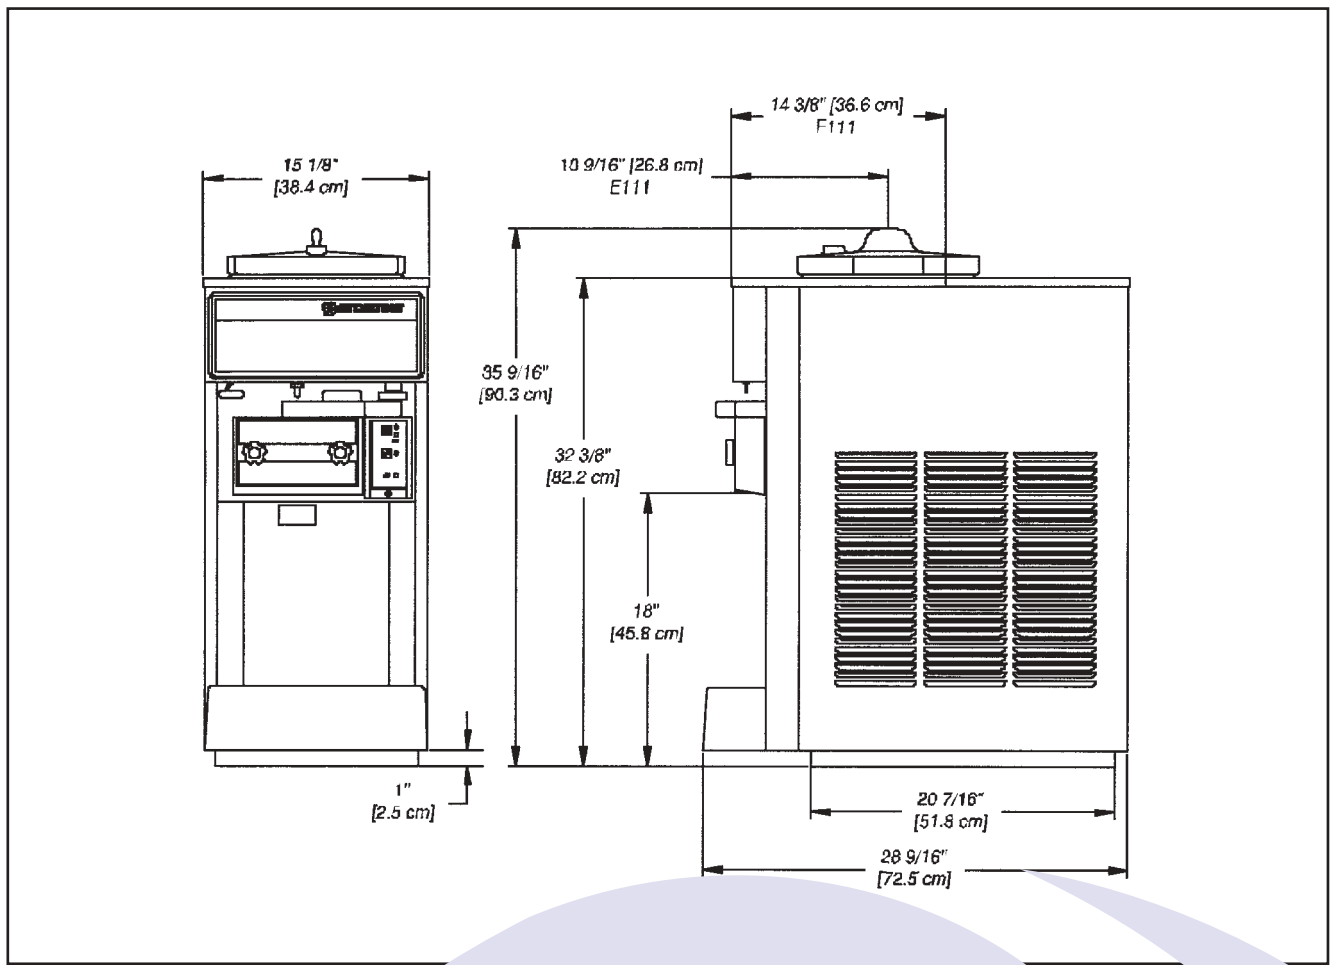

SPECIFICATIONS	MODEL E111 (air-cooled)		MODEL F111 (air-cooled)	
	FREEZER	WITH CRATE	FREEZER	WITH CRATE
DIMENSIONS				
Depth	28 9/16" (75.1 cm)	33 1/2" (85.1 cm)	28 9/16" (75.1 cm)	33 1/2" (85.1 cm)
Width	15 1/8" (38.4 cm)	19 1/2" (49.5 cm)	15 1/8" (38.4 cm)	19 1/2" (49.5 cm)
Height	35 9/16" (90.3 cm)	43" (109.2 cm)	35 9/16" (90.3 cm)	43" (109.2 cm)
WEIGHT				
FREEZER	220 lbs. (99.8 kg)	265 lbs. (120.2 kg)	FREEZER	230 lbs. (104.3 kg)
WITH CRATE			WITH CRATE	275 lbs. (124.7 kg)
ELECTRICAL	1 phase, 115 volt, 60 Hz. Factory pre-wired with a NEMA 6-20P, 7 ft. power cord Total running amps: 14. Maximum fuse size: 15 amp HACR type, or regular circuit breaker		1 phase, 208/230 dual voltage, 60 Hz. Factory pre-wired with a NEMA 6-15P, 7 ft. power cord. Total running amps: 10. Maximum fuse size: 15 amp HACR type, or regular circuit breaker	
REFRIGERANT	R404A		R-22	
COMPRESSOR	3,550 B.T.U./hr.		4,770 B.T.U./hr.	
DRIVE MOTOR	3/4 H.P.			
COOLING	Air cooled.			
AIR FLOW	Left to Right air flow. Units require 3" (7.6 cm.) clearance on both sides of unit.			
HOPPER SIZE	12 Quarts		12 Quarts	
BARREL SIZE	2 Quarts		3 Quarts	
WARRANTY	One-year parts and labor warranty; five year warranty on compressor, evaporator assembly, drive motor, speed reducers, and auger.			

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



502 Highway 67 • Kiel, WI 53042-1600
 920-894-2293 • 800-558-5807
 Fax: 920-894-7029
 E-mail: commercial@stoelting.com
 Internet: www.stoelting.com

Certified, Listed and/or
Recognized by:

